

ApeosPrint C5570

A3 Colour Printer


High print speed with robust security features




New Times, New Apeos

The new "Apeos" offers advanced features with high security level and easy operability to help business diversify with times.


"Apeos" devices are able to connect smoothly with a variety of solutions and services to realise an all new agile remote workstyle of working anytime, anywhere.



A3 Colour / 55 ppm (A4 LEF)



Print Resolution up to 1,200 x 2,400 dpi
USB, Ethernet, Wi-Fi* connectivity



Finishers*
*Optional



Fast quality output and high productivity

Speedily usable

- High speed output of 55 ppm (A4 LEF) for both colour and monochrome, meeting high-volume colour printout needs in office
- Fast first print output time of 5.0 seconds or less* for colour, and 3.5 seconds or less* for mono printing to reduce waiting time

* The time between the start of the print operation and the ejection of the first sheet of paper

Automate finishing*

Supports frequently-used office functions such as Punch, Saddle Staple, and Single Fold. From printing to post-processing, you can do it all at once.

* Optional



High durability*

Durability* is as high as 1.5 million sheets, so it can be used as a central machine in offices.

* When continuously printing the same A4 LEF original. When periodic replacement parts are properly replaced.

Superb print quality

- Print resolution up to 1,200 x 2,400 dpi
- Super EA-Eco toner for sharp text and fine lines
- Rich colour expression with LED printhead and IReCT*

* Image Registration Control Technology

In-house promotional materials creation

- Supports long paper up to 320 x 1,200 mm
- Supports 52 to 300 gsm paper from lightweight to cardstock paper such as certificate of commendation
- Bypass Tray supports postcards and envelopes, and an optional "Envelope Tray" is available



Eco-support

- Toner save function in increments of 1%
- Super EA-Eco toner: Fusing achieved at a low temperature contributes to low power consumption

Large paper capacity of up to 6,140 sheets & various finishing options are available according to your needs.

Standard Model



Paper capacity of up to 1,130 sheets

With Tandem Tray Module



Paper capacity of up to 3,200 sheets

With 2 Tray Module and High Capacity Feeder B1



Paper capacity of up to 4,170 sheets

With 2 Tray Module, Finisher-B4 / B5, Booklet Maker Unit and Hole Punch Kit



Paper capacity of up to 2,170 sheets

- Staple capacity of 50 sheets¹
- Staple-free Staple²
- Punch³
- Saddle Staple⁴
- Single Fold ⁴

Note: All models come with two Standard Trays. Paper capacity (80 gsm) includes Bypass Tray

Quick and simple operability

Seamless connectivity with mobile devices or USB flash drive

- Mobile devices can be connected for print jobs*¹ using the Print Utility*² application
- Directly print documents from the USB flash drive for greater work efficiency

*1: Connect to machine via optional wireless LAN environment.

*2: It can be downloaded free of charge from Google Play™ or App Store.



Simple layout with easy navigation

- Home screen personalisation for ease of access to commonly used functions
- When using Private Charge Print, documents can be easily selected or deleted by viewing the preview or thumbnails* on the touch panel.

* Optional storage (SSD) is required for preview and thumbnail view.



Streamline operations for remote work style

Supports wireless LAN environment*

- Being wireless-enabled, device can be installed anywhere in your office
- Up to five Wi-Fi Direct devices can be connected at the same time
- You can easily print from mobile devices using Print Utility, AirPrint, and Mopria® Print Service

* Optional

Server-less Authentication*

By sharing users registered in the printer among multiple connected devices, you can register and authenticate using IC Card from any devices in a serverless environment.

* Optional

Supporting Universal Print by Microsoft*¹

By registering ApeosPrint C5570 to Universal Print by Microsoft in advance, users*² authenticated with Azure AD can print from anywhere through the cloud.

*1: Optional Storage (SSD) is required

*2: Organizations with Microsoft Windows Enterprise or Microsoft 365 subscriptions

Print from any of the printer within the office

With Server-less On-Demand Print*, you have the flexibility to print and collect the print outs from any of the connected printer.

- Improves productivity by printing from another available device when the current device is in use
- Up to 100 devices can be linked

* Optional

Safeguard important information

- Prevents paper information leakage with Secure Print and Private Charge Print with IC card authentication*
- Job logs and the image itself can be stored and managed, enabling prompt investigation upon information leakage with Image Log*
- Newly support WPA3 as latest wireless LAN security protocol and adopt TPM (Trusted Platform Module) 2.0, as a security chip that conforms to the latest standards with enhanced encryption
- Detects tampering of device software and self-repairing feature protects and repairs device software against tampering events
- Provides more robust and secured office environment with enhanced security feature of both hardware and software

* Optional




With Tandem Tray Module, High Capacity Feeder B2, Finisher-C4 / C5 with Booklet Maker and Folder Unit CD3



Paper capacity of up to 6,140 sheets

- Staple capacity of 65 sheets*^{1,5}
- Staple-free Staple*²
- Punch*⁶
- Saddle Staple
- Single Fold
- Tri-fold*⁷
- Z fold Half Sheet*⁷

Staple-free stapling

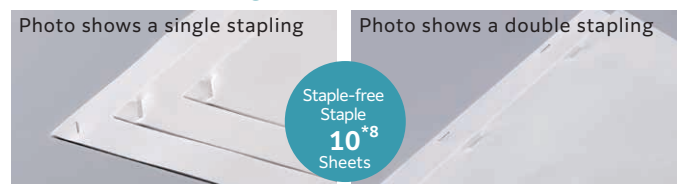

*1: 90 gsm or less.

*2: Applicable models: Finisher-B5, Finisher-C5 and Finisher-C5 with Booklet Maker.

*3: Optional Punch Unit is required.

*4: Optional Booklet Maker Unit is required. When specifying Saddle Staple or Single Fold with Finisher-B4 / B5, paper is not folded but creased.

*5: When optional Finisher-C Staple Unit 65 sheets is installed.

*6: Finisher with Punch Unit is available.

*7: Folder Unit is required.

*8: 80 gsm or less.

ApeosPrint C5570 Functions & Specifications

Items	Description	
Printing Method	LED Electrophotography	
Warm-up Time	[Embedded Plug-ins / Custom Services] *1 When enabled: 27 seconds or less (23 degrees Celsius room temperature). 11 seconds or less from Sleep Mode When disabled: 21 seconds or less (23 degrees Celsius room temperature). 11 seconds or less from Sleep Mode	
Continuous Print Speed*2	Simplex	A4 LEF: Colour 55 ppm, B/W 55 ppm A3: Colour 27 ppm, B/W 27 ppm
	Duplex	A4 LEF: Colour 55 ppm, B/W 55 ppm A3: Colour 19 ppm, B/W 19 ppm
First Print Output Time*3	Colour: 5.0 seconds, B/W: 3.5 seconds (A4LEF)	
Printing Resolution	Standard	[PCL Driver] Standard: 1,200 x 2,400 dpi, High Quality: 1,200 x 2,400 dpi, High Resolution: 1,200 x 1,200 dpi [Adobe® PostScript® 3™ Driver] High Speed (Standard): 600 x 600 dpi, High Quality: 1,200 x 2,400 dpi, High Resolution: 1,200 x 1,200 dpi
		Tray 1
	Tray 2	SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3, 11 x 17", JIS B4, A4, JIS B5, A5, Legal, Letter, Custom Size (Width: 100 to 320 mm, Length: 148 to 457.2 mm)
	Bypass Tray	SRA3 (320 x 450 mm), 12 x 19" (305 x 483 mm), 12 x 18" (305 x 457 mm), A3, 11 x 17", JIS B4, A4, JIS B5, A5, Legal, Letter, Long Paper A (297 x 900 mm), Long Paper B (297 x 1,200 mm), Custom Size (Width: 89 to 320 mm, Length: 98 to 1,200 mm)
Paper Size	Optional Tray	2 Tray Module: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3, 11 x 17", JIS B4, A4, JIS B5, A5, Legal, Letter, Custom Size (Width: 100 to 320 mm, Length: 148 to 457.2 mm)
		Tandem Tray Module: A4, JIS B5, Letter High Capacity Feeder B1 / B2: A4 LEF, Letter LEF, JIS B5 LEF Envelope Tray 2: DL LEF, ISO-C4, ISO-C5 LEF, ISO-C6 LEF, Commercial #10 LEF, Monarch 7/3/4 LEF, Custom Size (Width: 90 to 241 mm, Length: 98 to 372 mm)
	2 sided printing	SRA3 (320 x 450 mm), 12 x 19" (305 x 483 mm), 12 x 18" (305 x 457 mm), A3, 11 x 17", JIS B4, A4, JIS B5, A5, Legal, Letter, Custom Size (Width: 128 to 320 mm, Length: 139.7 to 482.6 mm)
	Standard Tray	52 to 300 gsm
Paper Weight*4	Bypass Tray	52 to 300 gsm
	Optional Tray	2 Tray Module / Tandem Tray Module: 52 to 300 gsm, High Capacity Feeder B1 / B2: 55 to 216 gsm Envelope Tray 2: 75 to 90 gsm (Envelope), 106 to 220 gsm (Postcard), 83 to 105 gsm (Bond)
	2 sided printing	52 to 300 gsm
Paper Tray Capacity*5	Standard	520 sheets x 2-tray + Bypass Tray 90 sheets
	Optional	2 Tray Module: 520 sheets x 2-tray Tandem Tray Module: 840 sheets + 1,230 sheets High Capacity Feeder B1: 2,000 sheets High Capacity Feeder B2: 2,940 sheets Envelope Tray 2: 50 sheets*6
	Max	6,140 sheets [Standard + Tandem Tray Module + High Capacity Feeder B2]
Output Tray Capacity*7	Upper Center: 250 sheets (A4 LEF) Lower Center: 250 sheets (A4 LEF)	
CPU	ARM A57 Quad Core-2.0 GHz	
Memory capacity	4 GB (Max: 4 GB)	
Storage device capacity*8	3.6 GB, Optional: 82 GB*9	
Page Description Language	Standard	PCL5 / PCL6, Adobe® PostScript® 3™
Supported Operating System*10	Standard	[PCL Driver] Windows 11 (64 bit), Windows 10 (32 bit / 64 bit), Windows 8.1 (32 bit / 64 bit), Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit), Windows Server 2012 R2 (64 bit), Windows Server 2012 (64 bit) [Mac OS X Driver] macOS 12 / 11 / 10.15 / 10.14 / 10.13 [Adobe® PostScript® 3™ Driver] Windows 11 (64 bit), Windows 10 (32 bit / 64 bit), Windows 8.1 (32 bit / 64 bit), Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit), Windows Server 2012 R2 (64 bit), Windows Server 2012 (64 bit) macOS 12 / 11 / 10.15 / 10.14 / 10.13
		Interface
Network Protocol	TCP/IP (Jpd, IPP, Port9100, WSD, ThinPrint)	
Power Supply*11	AC220-240 V +/- 10%, 10 A, 50/60 Hz common	
Operating Noise*12*13	Max	In Operation: 6.79 B, 51.3 dB (A) Ready Mode: 3.19 B, 14.4 dB (A)
Maximum Power Consumption	Max	1,600 W
	Average	Ready Mode: 74 W In Operation: 787 W Sleep mode: 0.5 W
Dimensions	W 620.0 x D 720.5 x H 699.1 mm	
Weight	Max	87 kg (Including consumables and drum)
	Average	82 kg (Excluding consumables and drum)

Note: WSD stands for Web Services on Devices.

*1: Embedded Plug-ins / Custom Services are enabled as factory default. You can change the settings if needed. *2: When Continuously Printing Original. The performance may be reduced depending on the paper type and the paper size. The speed may be reduced due to the image quality adjustment. *3: When feeding from feeder tray of machine. Numeric value varies depending on output environment. *4: It is recommended to use our recommended paper. Correct print output may not be possible depending on the requirement. *5: 80 gsm paper. *6: When using our designated paper. *7: 70 gsm paper. *8: The Storage Device Capacity is not totally available for customers. *9: When the optional Storage (SSD) is installed. *10: Please refer to our official website for the latest supported OS. *11: Power outlets that provide the above power level is recommended. Maximum machine measured current: 7.4 A. *12: Measured in accordance to ISO7779. Unit B: Sound Power Level LWAd, Unit dB: Radiated Sound Pressure Level LpAm (bystander position). *13: Main unit only.

Options

Product Name	Product Code	Product Name	Product Code
Stand 2	EC104179	Finisher-C5 2/3 Hole Punch	QC100210
2 Tray Module 2	EC104182	Finisher-C4 with Booklet Maker	QC100208
Tandem Tray Module	EC104190	Finisher-C4 with Booklet Maker 2/4 Hole Punch	QC100236
High Capacity Feeder B1	QC100223	Finisher-C4 with Booklet Maker 2/3 Hole Punch	QC100237
High Capacity Feeder B2	QC100215	Finisher-C5 with Booklet Maker 2/4 Hole Punch	QC100211
Envelope Tray 2	EC104198	Finisher-C5 with Booklet Maker 2/3 Hole Punch	QC100212
Long Paper inserter	EC104206	Transport Unit H4	QC100213
Side Tray	EC104843	Finisher-B4	QC100238
Data Overwrite Kit	EC104786	Finisher-B5	QC100206
Storage (SSD)	EC104787	Booklet Maker Unit for Finisher-B	EC104194
Finisher-B4	QC100238	2/4 Hole Punch Module for Finisher-B	EC104195
Folder Unit CD3	QC100206	2/3 Hole Punch Module for Finisher-B	EC104196
Booklet Maker Unit for Finisher-B	EC104194	Finisher-C4	QC100207
2/4 Hole Punch Module for Finisher-B	EC104195	Finisher-C4 2/4 Hole Punch	QC100234
2/3 Hole Punch Module for Finisher-B	EC104196	Finisher-C4 2/3 Hole Punch	QC100235
Finisher-C4	QC100207	Finisher-C5 2/4 Hole Punch	QC100209
Finisher-C4 2/4 Hole Punch	QC100234		
Finisher-C4 2/3 Hole Punch	QC100235		
Finisher-C5 2/4 Hole Punch	QC100209		
		Wireless Network Kit 2	EC104218
		External Access Kit	EC104792
		Feature Enhance Kit	EC104793
		Remote Authentication Kit	EC104801
		Embedded IC Card Reader B	EC104805
		Software / Product Manual	EC104840

Consumables / Supplies

Product Name	Product Code	Product Life
Drum Cartridge	CT351368	Up to 70,000 pages*1
Toner Cartridge Black Starter	-	Up to 26,000 pages*2
Toner Cartridge Cyan Starter	-	Up to 15,000 pages*2
Toner Cartridge Magenta Starter	-	Up to 15,000 pages*2
Toner Cartridge Yellow Starter	-	Up to 15,000 pages*2
Toner Cartridge Black Standard	CT203875	Up to 26,000 pages*2
Toner Cartridge Cyan Standard	CT203876	Up to 25,000 pages*2
Toner Cartridge Magenta Standard	CT203877	Up to 25,000 pages*2
Toner Cartridge Yellow Standard	CT203878	Up to 25,000 pages*2
Waste Toner Container	CWAA1051	Up to 55,000 pages*3
Staple Types XE (2PCS)	CWAA0856	5,000 pieces x 2 boxes.
Staple Types XH (3PCS)	CWAA0855	Available only for the MFD with Finisher-C4 / CS Staple Unit 65 Sheets (Option). 5,000 pieces x 3 boxes.
Staple Types XG (4PCS)	CWAA0728	2,000 pieces x 4 boxes.

*1: The number of printable pages is a reference value derived from the average of 3 sheets printed in A4 LEF, 1 sided, image coverage per colour 5%, colour printing rate 100% in one setting, under continuous printing usage conditions. The actual number of printable pages may vary to below half the reference value, depending on paper type, paper direction, input/output tray settings, initialization operations upon powering ON/OFF the device, tuning operations to maintain print quality, and other such usage environment conditions. *2: Published value based on JIS X 6932 (ISO/IEC 19798) standards. The actual number of printable pages may vary significantly from the published value, depending on printing content, paper size, paper type, usage conditions, initialization operations upon powering ON/OFF the device, tuning operations to maintain print quality, and other such usage environment conditions. *3: The number of printable pages is a reference value when printing in A4 LEF, 1 sided, image coverage per colour 5%, Colour/Monochrome rate 60 : 40. The actual number of printable pages may vary significantly from the reference value, depending on printing content, paper size, paper type, usage conditions, initialization operations upon powering ON/OFF the device, tuning operations to maintain print quality, and other such usage environment conditions.

Notes:

- To comply with paper weight specifications, it is recommended to use our recommended paper. Document may not be printed correctly depending on usage conditions.
- Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

fujifilm.com/fbau

FUJIFILM

FUJIFILM Business Innovation Australia Pty Ltd

8 Khartoum Road MACQUARIE PARK NSW 2113 Australia
Tel. +61 2 9856 5000

The available model varies depending on the country/region. Please ask the sales representatives for details.

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions •Please note that reproduction of the following is prohibited by law :

- Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates.
- Unused postage stamps, post cards, etc.
- Certificate stamps stipulated by law.
- Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

Trademarks •FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. •ApeosPrint is registered trademarks or trademarks of FUJIFILM Business Innovation Corp. •Adobe, Adobe logo, PostScript and PostScript logo are either registered trademarks or trademarks of Adobe in the United States and/or other countries. •Mopria, the Mopria Logo, and the Mopria Alliance word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. •Apple, AirPrint and Mac are trademarks of Apple Inc. registered in the U.S. and other countries and regions. •All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.



For Your Safety

Before using the product, read the instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.