FUJ:FILM Value from Innovation

ApeosPort[®] Print C3830SD

A4 Colour Printer

Features




High Performance & Productivity

- Fast colour printing of up to 38 ppm, with a first page as fast as 7 seconds.
- Optional 650-sheet duo tray with 100-sheet Multipurpose Feeder and 550-sheet Tray supports high-capacity paper feeding of up to 1,451 sheets.
- Flexible media handling supports cardstock, small media, and envelopes.
- Flexible networking. Gigabit Ethernet capability enables faster communication between the printer and the network, and the optional Wi-Fi kit allows easy wireless connectivity.

Security

- Prevents information leakage with Confidential Print function
- Controls access to the Printer functions
- Supports IC card authentication*. You can easily authenticate without entering Username / Password.
 *Optional
- Supports settings to delete temporary data files in memory & hard disk as an option.

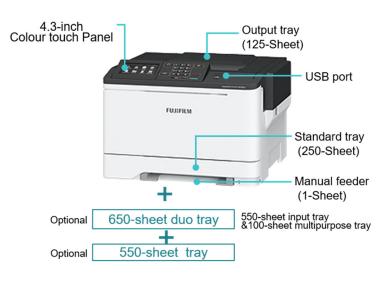



Easy Operation

- Equipped with 4.3-inch colour touch screen. Easy-to-understand and easy-to-use operations such as USB flash drive Print, Secure Print, and Job Verification.
- Compatible with Mopria[®] and AirPrint, you can easily print from mobile devices.
- Easy printing without PC. In addition to USB flash drive Print, Bookmark feature also allows you to print documents* on the server or the website.
 *PDF/TIFF/JPEG

Ecology

- Standard two-sided printing saves paper.
- Supports ECO mode for easy presetting of features that save paper and toner.



Specifications

| Drinting | | | |
|---|--|--|--|
| Printing | | | |
| Display | 4.3-inch (10.9 cm) Colour touch screen | | |
| Print Speed: Up to | Black: 38 ppm (A4) / Colour: 38 ppm (A4) | | |
| Time to First Page: As fast as ^{*1} | Black: 7 seconds / Colour: 7 seconds | | |
| Print Resolution | Black: 1200 x 1200 dpi, 4800 Colour Quality (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 Colour Quality (2400 x 600 dpi) | | |
| Memory | 1024 MB | | |
| Hard Disk | Option available | | |
| Supplies | | | |
| Toner Cartridge Yields (up to) | 7,000-page Colour (CMY) Ultra High Yield Cartridges, 10,500-page Black Ultra High Yield Cartridge | | |
| Imaging kit Estimated Yield: Up to | 125,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage | | |
| Cartridge(s) Shipping with Product | 2,000-page Colour (CMY) Toner Cartridges, 3,000-page Black Toner Cartridge | | |
| Paper Handling | | | |
| Included Paper Handling | 250-Sheet Input, 125-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed | | |
| Optional Paper Handling | 550-Sheet Tray, 650-Sheet Duo Tray | | |
| Paper Input Capacity: Up to | Standard: 250+1 pages 75 gsm / Maximum: 1450+1 pages 75 gsm | | |
| Paper Output Capacity: Up to | Standard: 125 pages 75 gsm | | |
| Media Types Supported | Card Stock, Envelopes, Paper Labels, Plain Paper, Vinyl Labels | | |
| Media Sizes Supported | A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope | | |
| General Information | | | |
| Standard Ports | USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A) | | |
| Wi-Fi | Option available (802.11 a/b/g/n/ac Wireless) | | |
| Noise Level: Operating | Print: 51 dBA | | |
| Specified Operating Environment*2 | Humidity: 8 to 80% ¹³ Relative Humidity, Temperature: 10 to 32°C ¹⁴ (excluding faults caused by condensation) | | |
| Size (mm - H x W x D) / Weight (kg) | 308 x 442 x 421 mm / 21 kg | | |
| *1. The time from when the device starts the prin | t job from standard sheet tray until the trailing edge of the first page exits into output tray. Numeric value may vary base | | |

1: The time from when the device starts the print job from standard sheet tray until the trailing edge of the first page exits into output tray. Numeric value may vary based on the output environment. *2: Depending on the paper used, the print quality may be degraded until the temperature and humidity environment just before use and the inside of the printer fit into the installation environment. *3: When the humidity is 80%, the temperature is 25.5°C or less. *4: Humidity 45% or less when the temperature is 32°C.

Options

| Product Name | Product Code |
|--------------------------------------|--------------|
| 550-Sheet Tray | EC104314 |
| 650-Sheet Duo Tray | EC104316 |
| Wireless Print Server | EC104320 |
| 500 GB Hard Disk | EC104327 |
| Contactless Authentication Device | EC104333 |

Consumables*1

| Product Name | Product Code | Product Life | |
|---|--------------|---------------------|--|
| Black Ultra High Yield Use & Return Toner Cartridge ^{*2} | CT203466 | Up to 10,500 pages | |
| Cyan Ultra High Yield Use & Return Toner Cartridge ^{*2} | CT203467 | Up to 7,000 pages | |
| Magenta Ultra High Yield Use & Return Toner Cartridge ^{*2} | CT203468 | Up to 7,000 pages | |
| Yellow Ultra High Yield Use & Return Toner Cartridge ^{*2} | CT203469 | Up to 7,000 pages | |
| Black Ultra High Yield Regular Toner Cartridge | CT203512 | Up to 10,500 pages | |
| Cyan Regular Toner Cartridge | CT203513 | Up to 7,000 pages | |
| Magenta Regular Toner Cartridge | CT203514 | Up to 7,000 pages | |
| Yellow Regular Toner Cartridge | CT203515 | Up to 7,000 pages | |
| Black Use and Return Imaging Kit*2 | CT300294 | Up to 125,000 pages | |
| Black and Color Use and Return Imaging Kit *2 | CT300295 | Up to 125,000 pages | |
| Black Regular Imaging Kit | CT300298 | Up to 125,000 pages | |
| Black and Color Regular Imaging Kit | CT300299 | Up to 125,000 pages | |
| Waste Toner Bottle | CWAA0972 | Up to 25,000 pages | |
| *1: Average continuous block or continuous composite Colour (CMV) declared viold in one sided (simpley) | | | |

1: Average continuous black or continuous composite Colour (CMY) declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19798.

*2: The Use and Return consumables are sold with at a special price contingent upon customer's agreement to use them only once and return them to us for remanufacturing or recycling. For details, please refer to our website.

Notes Although Use and Return consumables are initially installed, consumables without the single-use term, which may be refilled or remanufactured by you or a third party, are available. For details, please refer to our website.

For more information or detailed product specification, please call or visit us at

Branch of FUJIFILM Business Innovation Asia Pacific Pte. Ltd. (Cambodia Branch)

No. 321, City Tower 5th Floor, Room 5B, Mao Tse Toung Blvd, Phsar Depo 1, Khan Toul Kork, Phnom Penh, Cambodia Tel. +855-0-2396-4501 Fax. +855-0-2396-4505

fujifilm.com/fbca

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

+FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. ApeosPort is registered trademarks or trademarks of FUJIFILM Business Innovation Corp. •Apple, AirPrint and Mac are trademarks of Apple Inc. registered in the U.S. and other countries. •Mopria®, the Mopria® Logo, and the Mopria Alliance[™] word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. •All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.