





New Times, New Apeos

The new "Apeos" offers advanced features with high security level and easy operability to help business diversify with times. "Apeos" devices are able to connect smoothly with a variety of solutions and services to realise an all new agile remote workstyle of working anytime, anywhere.



Reliable high volume printing with accelerated workflows

Apeos 7580 / 6580

Copy/Print	Scan	Fax ^{*3}	Printing Resolution	Control Panel
7580 75 ppm*1 6580 65 ppm*1	Colour / Monochrome 270 ppm*2	Super G3 FAX	1,200 X 1,200 dpi*4	10.1 " Tilted Colour Touchscreen

[●]Cloud enabled ●Mobile enabled ●Security ●Multi-feed detection

^{*1:} A4 LEF. *2: When using the Duplex Automatic Document Feeder. (1 pass, 2 sided scanning. Our Standard Paper (A4 LEF), 200 dpi, to Folder.) *3: Optional. *4: Print Function.

High performance for greater work efficiency

Greater efficiency with an ever-ready device

- Quick start up and output allows the machine to deliver in time-sensitive situations with the following features
- First Copy Output Time of 3.0 seconds*
- Smart WelcomEyes detects a user and automatically "wakes" the machine up from sleep
- Recovers from sleep mode within 30 seconds
- Predicts print completion time to help efficient workplan management

Durability meets higher productivity

- Unparallel productivity with high print speed up to 75 ppm^{*1}
- Standard paper capacity of 4,645 sheets ² (further scalable to 8,800 sheets ^{22*3}) provides you with uninterrupted continuous printing
- Excellent durability and ability to handle core output and high volume high speed printing
- High-capacity toner cartridge along with long life photoreceptor drum helps maintain optimum productivity levels with less frequency of replacing consumables
- *1 : A4 LEF for 7580. *2 :80 gsm Paper. *3 :Standard + High Capacity Feeder C1-D2.

Main unit + High Capacity Feeder B1 High Capacity Feeder C1-D2




Accelerate your hybrid work style with fast Paper-less workflows

- Equipped with a single-pass colour Duplex Automatic Document Feeder (DADF)
- Faster and continuous workflows can be created around 270 ppm*1 scan speed and 250 sheets*2 DADF paper capacity
- More versatility can be added to required workflows with DADF supporting wide range of media from 38^{*3} to 200 gsm



Automatic Document Feeder


- Improves workflow efficiency by automatically scanning custom-size or small-size documents such as receipts into the nearest standard size
- Equipped with multifeed detection, preventing scanning errors when copying or scanning multiple documents
- Light notification reminds user of uncollected original
- 1: 1 pass, 2 sided scanning. Our Standard Paper (A4 LEF), 200 dpi, to Folder. *2: 80 gsm paper.
- *3: For 1 sided original. 50 gsm for 2 sided original.

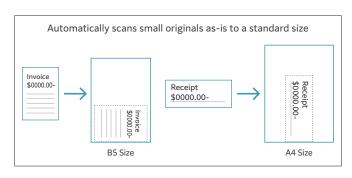

Professional finishing options catered to various office needs

Supports the staple-free stapling


• In addition to the traditional stapling with needles, supports multi-position single and double Staple-free Stapling



Save paper while creating an easy to read material with combination of finishing options like N-up (Multiple pages on one side)and booklet creation



Easy document handling for mixed size job output (e.g. combined out of A3 and A4 sheets with multiple stapling)



Post-processing example














Finisher-C4 / C5





Finisher-C4 / C5 with Booklet Maker + Folder Unit CD3



Finisher D6 with Booklet Maker + Folder Unit CD2



Sort / Stack Staple (100 sheets) / Auto staple cutting Punch*4

Saddle Staple (30 sheets) / Single Fold (5 sheets) Z Fold Half Sheet*8 / Tri-Fold* Covers*4 / Separators

- *1: Finisher-C5 (2/4 holes) or Finisher-C5 (2/3 holes), *2: Finisher-C5 with Booklet Maker (2/4 holes) or Finisher-C5 with Booklet Maker (2/3 holes), *3: 80 gsm or less, *4: Optional.
- *5: Finisher-C4 (2/4 holes) or Finisher-C4 (2/3 holes). *6: Finisher-C4 with Booklet Maker (2/4 holes) or Finisher-C4 with Booklet Maker (2/3 holes). *7: Folder Unit CD3 is required.

^{*8:} Folder Unit CD2 is required.

Quick and simple operability

Simple layout with easy navigation

Black and gray tone UI gives better contrast for easy recognition.

- Icons are evenly spread for easy recognition
- Consistent operation steps of each function for easy recall
- Home screen personalisation for ease of access to commonly used functions
- Pin regular settings for registering frequent or repeated jobs
- Clear visible light notifications for completed or error jobs
- Subtle sound notification for alert and attention



Smartphone becomes a "portable operation panel"

Seamless connectivity with mobile devices for Copy, Fax, Print, Scan*1 jobs using the Print Utility*2 application.

- Mobile device can be used as an alternative UI for operations control to minimise common touch points
- Frequent settings can be saved as "Favourites"
- Directly send fax or email with the addresses stored in the smartphone
- Minimise printer touch points for hygiene reasons
- Quickly establish direct Wi-Fi connection by scanning the QR code on the user panel

Note: Connect to machine via wireless environment or Wi-Fi Direct connection.

- *1: Scan to Mobile, E-mail, Scan to Folder.
- *2: It can be downloaded free of charge from Google Play™ or App Store.

Flexibility in office layout

Supports wireless LAN environment*1.

- Supports free addressing in the office with Wi-Fi support
- Up to five Wi-Fi Direct multifunction devices can be connected at the same time
- Supports direct mobile printing*2
- Print Utility, AirPrint, and Mopria® Print Service are supported
- *1: Optional
- *2: When connecting to Wi-Fi Direct.

Print out from any multifunction device within the office

With Server-less On-Demand Print*, you have the flexibility to print and collect the print outs from any of the connected multifunction devices.

- Improves productivity by printing from another available multifunction device when the current device is in use
- Up to 100 units can be linked
- Specific job settings can be revised at the device level to save time (1 sided to 2 sided, adding staple)
- * Optional.

Simple device management with Server-less Authentication

Server-less Authentication* enables user information to be synchronised among multifunction devices in the same group and allows administrators to reduce their workloads.

- Simply tap your card to link the user ID with the multifunction device
- The ID information is automatically shared with the other multifunction devices in the same network
- Authentication can be performed with any devices in the office
- * Optional



Various features saving time and effort in scanning operation


Scanned data can be transferred through a variety of methods including Email, URL, and send to PC (SMB/FTP/SFTP).

- Data can be sent by using multiple features simultaneously
- Improve your digitalisation process with features including automatic orientation of scanned page to upright position, correcting the skewed page, or removing blank pages
- In addition to TIFF and JPEG, the scanned data can be converted to OCR-enabled* or high compression/ specific colour PDF or DocuWorks documents. Also they can be converted to editable Excel/Word documents*
- With ScanAuto, you can easily send the scanned data to your e-mail address by simply pressing a button
- * Optional.

Digitisation of paper documents for effortless document management

With Scan Delivery*, you can automatically process and store scanned images by simply pressing the preset button for each workflow or document type.

- Automate to set file format, file name, OCR*, etc.
- Automatically stores scanned and processed documents in the appropriate destination
- Specify particular words or characters in a document as the folder or file name
- $\, \bullet \,$ 0 and other frequently mis-recognised characters can be read correctly
- * Optional.





QR codes and bar codes application

Where QR code or bar code is available on the headsheet or content body of the original document for scanning, Scan Delivery will recognise and process the information accordingly.

Streamline operations for remote work style

Do not miss any faxes when you are working remotely

Paperless fax function automatically stores received faxes into folders which can be transferred to a PC or sent as emails.

- Received faxes can be forwarded to your mobile device by email
- Received faxes can be transferred to Working Folder*1
- It can be sorted by fax number, date received, and person in charge*2
- Incoming fax processing can be switched by time, day of the week and period*2
- For example, you can switch from paper-based output to an electronic transfer in a single operation*²
- *1: Cloud services provided by FUJIFILM Business Innovation. A separate contract is required.
- *2: Optional

Easy and secure output even when you are working remotely


With Cloud On-Demand Print*, you can register documents from a PC or mobile device to the cloud server and print them from the designated multifunction device.

- Can be operated securely using a User ID and password
- Fear of loss or stolen data is minimised
- No dedicated driver is required
- * Cloud services provided by FUJIFILM Business Innovation. A separate contract is required.

Share information anytime, anywhere

With Working Folder* and internet access, documents can be viewed regardless of time and location.

- Can be linked smoothly with multifunction devices, DocuWorks, and mobile devices
- Documents in Working Folder can be printed from the control panel
- Scanned documents will be assigned a file name and stored in Working Folder. An email notification will be sent to relevant users

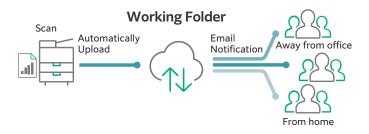

* Cloud services provided by FUJIFILM Business Innovation. A separate contract is required.

Supporting Universal Print by Microsoft


By registering multifunction devices to Universal Print by Microsoft in advance, users $^{\star 1}$ authenticated with Microsoft Entra $ID^{\star 2}$ can print from anywhere through cloud.

- *1: Organizations with or Microsoft Windows Enterprise or Microsoft 365 subscriptions.
- *2: Formerly Azure Active Directory.

Centralised cloud integration

Cloud Service Hub* allows single sign-on to multiple cloud storage services.

- Specific storage location can be assigned for scanned documents directly from the multifunction device
- Searching documents from multiple cloud services is supported
- Full-text search on scanned documents can be performed with OCR



* Cloud services provided by FUJIFILM Business Innovation. A separate contract is required.

Initiatives for environmental consideration



We are working to develop environmentally conscious products, including technologies that reduce the power consumption of multifunction devices and printers to achieve lower environmental impact.

Fujifilm Group introduced the certification program in which we clarify the environmental value of each product by assessments at the time of product development, conduct the evaluation based on our in-house certification criteria and certify the products* that are excellent in reducing environmental impact as "Green Value Products".

* Products and services excellent in reducing environmental impact are those designed in consideration of environmental impact throughout their life cycle from acquisition of raw materials, production, usage, disposition, to reuse.

Initiatives for energy conservation

- Achieve both high image quality and energy conservation by adopting Super EA-Eco toner that has low temperature fusing performance
- Reduce the power consumption with the smart power saving feature that solely powers on the required parts according to the functions being used by customers

Initiatives for resources conservation

- Staple-free stapling that helps reducing waste and that also can be used with peace of mind at certain places where need considerations for safety or any contamination
- Functions contributing to paper consumption reduction -Private Charge Print, Scan, Paperless Fax, Pages per Side/Multiple-Up etc.
- Adopt design for making products easy to reuse/recycle after use

Safeguard important information

Information is an important asset which should be protected at all cost

Protect from unauthorised user

Multiple options of setting user authorisation allow administrator to select a right combination as per given environment.

- Local Authentication
- Authentication by Remote Server*
- IC Card Authentication*
- User-specific feature access
- Private Charge Print
- * Optional.

Additional layer of unwanted access can be created for specific users (e.g. guests).

- Secondary Ethernet Kit*
- * Optional.

Protects Data

Protects against any malicious intent of hacking, tampering with device / system settings.

- Encryption of stored data
- Uses TPM* 2.0 chip for encryption key management
- Deletes settings and document information all at once
- * Trusted Platform Module

Protects the information by means of strong encryption while transferring it between devices, servers etc.

- Encryption of communication paths by SSL/TLS or IPsec
- Encryption when transferring via SMBv3 and SFTP
- Scan file encryption / signature
- Email encryption and signature by S/MIME
- TLS version limit
- Elliptic curve cryptography
- WPA3

Protect from unauthorised access

Protects device settings at multiple levels by clearly demarking change restrictions for different target audience - End users, IT administrators and Service Engineers.

- Service representative operation restriction
- Account lock to prevent unauthorised access
- Information for changing the default password
- Warnings displayed when using global IP address

Prevents unauthorised program from installing without notice. Robust IT audits are supported with device data logs for easy tracking.

- Software signature verification
- Remote update restrictions
- IP address filtering
- Tampering detection at startup and automatic restoration when tampering is detected
- Prevention of tampering during operation
- Audit log
- Audit log system transfer

Prevents operation errors

Prevents information leakage due to inadvertent mistakes by administrators and users.

- Scan documents to be delivered to fixed destination
- Re-enter fax recipient
- Annotations
- Hidden text printing*
- Digital code embedding and tracking function*
- * Optional

Security certifications

 Certified with ISO/IEC 15408, which is the international standard for designing and operating IT security

Reliable support system

Easy solutions to resolve problems

From supplies replacement to unexpected device failures, most problems can be resolved without waiting for the service representatives or sales representatives.

1. Resolve problem using the "Help" function on the device

- Self Help information is available on the control panel
- Self Help information can be accessed via the mobile device by scanning the QR code displayed on the control panel





2. "Remote Assistance" with the help of operators

- Connects directly to the Support Centre
- An operator will remotely access the multifunction device to resolve the problem by guiding through the steps on the shared control panel

Keeping a close eye on your multifunction device on a daily basis

Monitoring the multifunction device status to minimise operation down time.

- Check billing meter
- Automatically delivers consumables when cartridges level is low
- Detect machine errors for early invention to rectify the problem Note: You need to apply for using the EP service. (free of charge)

Making a backup of multifunction device's settings

Device Setup Editor is a free tool which helps you both, in editing device setting and creating a much-needed information backup for business continuity reasons.

- $\bullet\,$ A back up the device / printer settings can be created onto the PC
- Administrator can optimize device usage by viewing/editing these settings, best suited for their environment.
- When installing a new device, these settings can be migrated (or cloned) from the existing device to the new device

Apeos 7580 / 6580 **Functions & Specifications**

Basic Specifications / Copy Function

Item		Description		
		7500		
		7580 6580		
Туре		Console		
Memory capaci	ty	4 GB (Max: 4 GB)		
Storage Device	Capacity*1	128 GB		
Scan Resolution	1	600 x 600 dpi		
Printing Resolut	tion	2,400 dpi or equivalent × 600 dpi		
Warm-up Time	*2	[Embedded Plug-ins / Custom Services] ¹³ When enabled: 36 seconds or less (23 degrees Celsius room temperature) When disabled: 30 seconds or less (23 degrees Celsius room temperature)		
Recovery Time from Sleep mod		30 seconds or less (23 degrees Celsius room temperature)		
Original Size		Maximum of A3, 11 x 17", 297 x 432 mm for both Sheet and Book		
	Max	A3, 11 x 17", [12 x 18" (305 x 457 mm) when using Bypass Tray]		
Paper Size	Min	A5, [Postcard (100 x 148 mm) when using Bypass Tray]		
	Image loss width*4	Lead edge 4.0 mm, Trail edge 4.0 mm, Right / Left edge 4.0 mm		
Paper Weight*5	Paper Tray	52 to 200 gsm		
Paper weight	Bypass Tray	52 to 250 gsm		
First Copy Outp	ut Time	3.0 sec. (A4 LEF)		
	JIS B5 LEF	79 ppm 68 ppm		
Continuous	A4 LEF	75 ppm 65 ppm		
Сору	A4 / JIS B5	55 ppm 47 ppm		
Speed*6	JIS B4	44 ppm 39 ppm		
	A3	37 ppm 33 ppm		
	Standard	520 sheets x 2-tray + 1,560 sheets + 1,950 sheets + Bypass Tray 95 sheets		
Paper Tray Capacity*7	Optional	High Capacity Feeder B1: 2,000 sheets High Capacity Feeder C1-D2: 2,000 sheets x 2-tray + Bypass Tray 250 sheets		
Max		8,800 sheets [520 sheets x 2-tray + 1,560 sheets + 1,950 sheets + High Capacity Feeder C1-D2]		
Output Tray Cap	pacity*8	500 sheets (A4 LEF)		
Power Supply		AC220-240 V +/- 10 %, 10 A, 50/60 Hz common		
Maximum Power Consumption		2.4 kW Sleep Mode: 0.6 W, Low Power Mode: 103 W, Ready Mode: 167 W		
Dimensions*9		W 620 x D 804 x H 1,155 mm		
Dimensions 3				

^{*1:} The Storage Device Capacity is not totally available for customers. *2: It may change depending on usage conditions *3: Embedded Plug-ins / Custom Services are enabled as factory default. You can change the settings if needed. *4: Up to A3 size. *5: It is recommended to use our recommended apper. Correct print output may not be possible depending on the requirement. *6: The speed may be reduced due to the image quality adjustment. *7: 80 gsm paper. *8: 70gsm. When the optional Catch Tray is installed. *9: The width does not include the protrusion of Bypass Tray. *10: Excluding Toner Cartridge and Output Tray.

Print Function

Item		Description	
Туре		Built-in type	
Continuous P	rint Speed*1	Same as the Basic Specifications / Copy Function	
Printing	Standard	[PCL Driver] Standard: 600 x 600 dpi, High Quality: 1,200 x 1,200 dpi	
Resolution	Optional	[Adobe® PostScript® 3™ Driver] High Speed (Standard): 600 x 600 dpi, High Quality: 1,200 x 1,200 dpi	
Page	Standard	PCL5 / PCL6	
Description Language Optional		Adobe® PostScript® 3™	
Supported Operating	Standard	[PCL Driver] Windows 11 (64 bit), Windows 10 (32 bit / 64 bit), Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit), Windows Server 2012 R2 (64 bit), Windows Server 2012 (64 bit) [Mac OS X Driver] macOS 13 / 12 / 11 / 10.15 / 10.14	
System*2	Optional	[Adobe® PostScript® 3™ Driver] Windows 11 (64 bit), Windows 10 (32 bit / 64 bit), Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit), Windows Server 2012 R2 (64 bit), Windows Server 2012 (64 bit) macOS 13 / 12 / 11 / 10.15 / 10.14	
1.1.6	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB3.0	
Interface	Optional	Wireless LAN (IEEE 802.11a / b / g / n / ac)	

^{*1:} The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document. *2: Please refer to our official website for the latest supported OS.

Scan Function

Item		Description
Туре		Colour Scanner
Scan Resolution	on	600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi
Scan Speed		Same as the Scan Speed for the Duplex Automatic Document Feeder
Interface	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T
Optional		Wireless LAN (IEEE 802.11a / b / g / n / ac)

Fax Function (Optional)

Item	Description	
Original Size	Max: A3, 11 x 17", Long document (Longest 600 mm)	
Recording Paper Size	Max: A3, 11 x 17"; Min: A5	
Transmission Time	2 seconds and more but fewer than 3 seconds*1	
Transmission Mode	ITU-T G3	
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 3 ports ² (G3-3 ports)	

^{*1:} When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines/mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. *2: No. of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

Duplex Automatic Document Feeder

Item		Description	
		7580	6580
Туре		1 pass, 2-sided so	anning Duplex Automatic Document Feeder
Original Size / Paper Weight Max: A3, 11 x 17"; Min: A6 ⁻¹ 38 to 200 gsm (In Duplex: 50 to 200 gsm)			
Capacity*2		250 sheets	
	Copy (A4 LEF, Simplex)	75 ppm	65 ppm
Scan Speed*3 Scan (B/W: 135 ppm, C (1 pass, 2-sided s	olour: 135 ppm canning; B/W: 270 ppm, Colour: 270 ppm) ent (A4 LEF), 200 dpi, to Folder]

^{*1:} The minimum custom size is 84 x 139.7 mm. *2: 80 gsm paper. *3: The scanning speed varies depending on the documents.

High Capacity Feeder B1 (Optional)

Item	Description	
Paper Size	A4 LEF, Letter LEF, JIS B5 LEF*1, 7.25 x 10.5" LEF (184 x 267 mm)	
Paper Weight	52 to 200 gsm	
Feeding Capacity / Number of Tray*2	2,000 sheets x 1-tray	
Dimensions / Weight	W 389 x D 610 x H 377 mm, 29 kg	

^{*1:} The setting requires a customer engineer. Available to use by switching JIS B5 LEF and $7.25 \times 10.5^\circ$ LEF (184×267 mm). *2: 80 gsm paper.

High Capacity Feeder C1-D2 (Optional)

Item	Description
Paper Size	[Tray 6 / 7] A4 LEF, Letter LEF, JIS B5 LEF*1, 7.25×10.5 " LEF (184×267 mm) [Bypass Tray] Max: 12×18 " (305×457 mm), A3; Min: Postcard (100×148 mm)
Paper Weight	[Tray 6 / 7] 52 to 200 gsm [Bypass Tray] 52 to 250 gsm
Feeding Capacity / Number of Tray*2	2,000 sheets x 2-tray + 250 sheets*3
Dimensions / Weight	W 597 x D 661 x H 930 mm, 73 kg

Note: When this option is installed, the optional Bypass Tray is required. (Standard Bypass Tray is not available, when High Capacity Feeder C1-D2 is installed.) *1: The setting requires a customer engineer. Available to use by switching JIS B5 LEF and 7.25 x 10.5" LEF (184 x 26" mm). *2: 80 gsm paper. *3: When High Capacity Feeder C1-D2 is installed, the capacity of Bypass Tray is up to 250 sheets.

Catch Tray (Optional)

Item	Description	Description	
item	Offset Catch Tray	Simple Catch Tray	
Paper Size	Max: 12 x 18" (305 x 457	Max: 12 x 18" (305 x 457 mm), A3 Min: A6, Postcard (100 x 148 mm)	
Paper Weight	52 to 250 gsm	52 to 250 gsm	
Paper Capacity*	500 sheets		
Dimensions	W 423 x D 399 x H 331 m	m	
Weight	6 kg	4 kg	

Folder Unit (Optional)

Item		Description		
		Folder Unit CD3	Folder Unit CD2	
Z Fold Half	Paper Size	A3, 11 x 17", JIS B4		
Sheet	Paper Weight	64 to 90 gsm	60 to 90 gsm	
	Paper Size	A4, Letter		
Tri-fold	Paper Weight	64 to 90 gsm	60 to 90 gsm	
III-IOIG	Paper Capacity*1	40 sheets		
Power Supply*2 / Maximum Power Consumption		AC100-127 V +/- 10 %, 1 A, AC200 common, 120 W	-240 V +/- 10 %, 0.6 A, 50/60 Hz	
Dimensions / Weight		W 232 x D 588 x H 992 mm, 52 kg	W 232 x D 725 x H 992 mm, 55 kg	

Note: Folder Unit CD3 is optional of Finisher-C4 / Finisher-C5 / Finisher-C4 with Booklet Maker / Finisher-C5 with Booklet Maker. Folder Unit CD2 is optional of Finisher D6 / Finisher D6 with Booklet Maker. *1: 70 gsm paper. *2: Power supply separate from the Main Unit is required.

Notes:

- Notes:

 I) If the storage media of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall "the company" be liable for any damages whatsoever arising from loss of data.
- 2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured

Finisher-C4 / C5, Finisher-C4 / C5 with Booklet Maker (Optional)

Item		Description		
item		Finisher-C4 / C5	Finisher-C4 / C5 with Booklet Maker	
	Output Tray	Sort (Offset available) / Stack (Offset available)		
Туре	Finishing Tray	Sort (Offset available) / Stack (Offset available)		
	Booklet Tray	-	Sort / Stack	
D 01	Output Tray	Max: 12 x 18" (305 x 457 mm), A3 Min: A5, Postcard (100 x 148 mm)		
Paper Size	Finishing Tray	Max: 12 x 18" (305 x 457 mm), A3 Min: JIS B5 LEF		
Paper Weight	Output Tray	52 to 250 gsm*1		
Paper Weight	Finishing Tray	52 to 250 gsm*1		
	Output Tray	500 sheets (A4)		
Paper Capacity* ²	Finishing Tray	[Without Stapling] A4: 3,000 sheets, JIS B4 or larger: 1,500 sheets, Mixed Size Stacking*3: 300 sheets [With Stapling] A4: 200 sets or 3,000 sheets, JIS B4 or larger: 100 sets or 1,500 sheets, Mixed Size Stacking*3: 70 sets or 200 sheets	[Without Stapling] A4: 1,500 sheets, JIS B4 or larger: 1,500 sheets, Mixed Size Stacking ⁻³ : 300 sheets [With Stapling] A4: 200 sets or 1,500 sheets, JIS B4 or larger: 100 sets or 1,500 sheets, Mixed Size Stacking ⁻³ : 70 sets or 200 sheets	
	Booklet Tray	-	20 sets*4	
	Capacity	Staple: 50 sheets (90 gsm or less)*5 Staple-free Staple*6*7: 10 sheets (80 gsm or less)		
Staple	Paper Size*8	Max: A3, 11 x 17"; Min: JIS B5 LEF		
	Paper Weight	Staple: 52 to 200 gsm, Staple-free Staple*6 *7: 64 to 105 gsm		
	Position	Single stapling, Dual stapling		
		2-hole / 4-hole punch or 2-hole / 3-h	nole punch (US Specifications)	
Punch*9	Paper Size*10	Max: A3, 11 x 17"; Min: JIS B5		
	Paper Weight	52 to 200 gsm		
	Capacity*11	-	Saddle Staple: 20 sheets (90 gsm or less) Single Fold: 5 sheets (90 gsm or less)	
Booklet Finishing	Paper Size	-	Max: 12 x 18" (305 x 457 mm), A3 Min: JIS B5 SEF	
	Paper Weight*12	-	Saddle Staple: 64 to 200 gsm Single Fold: 64 to 200 gsm	
Dimensions*13		W 717 x D 692 x H 1,054 mm When Folder Unit CD3 is installed: W 954 x D 692 x H 1,054 mm	W 722 x D 692 x H 1,054 mm When Folder Unit CD3 is installed: W 959 x D 692 x H 1,054 mm	
Weight		Finisher-C4 (w/o Punch): 46 kg Finisher-C4 (w Punch): 49 kg Finisher-C5 (w Punch): 54 kg Folder Unit CD3: + 52 kg	Finisher-C4 with Booklet Maker (w/o Punch): 59 kg Finisher-C4 with Booklet Maker (w Punch): 62 kg Finisher-C5 with Booklet Maker (w Punch): 66 kg Folder Unit CD3: + 52 kg	

Note: Only stapled stapling is available with Finisher-C4 and Finisher-C4 with Booklet Maker. You cannot add staple-free stapling function. Note: Both stapled stapling and staple-free stapling function. Note: Both stapled stapling and staple-free stapling are available with Finisher-C5 and Finisher-C5 with Booklet Maker. Note: Transport Unit and Finisher Installation Kit are required. *1: 52 to 55 gsm output paper may not be aligned properly depending on the paper type. *2: 70 gsm paper. *3: When larger size sheets are stacked on top of smaller size sheets. *4: When the output paper size is the same. *5: Up to 65 sheets can be stapled when the Finisher-C5 taple Unit 65 Sheet is installed. However, depending on the paper type, incorrect stapling such as uneven edge aligned of sex and output paper size is the same. *5: Up to 65 sheets can be stapled when the Finisher-C5 taple Unit 65 Sheet is installed. However, depending on the paper type, incorrect stapling such as uneven edge aligned proposed to the stapling such as uneven occur. 76: Staple-free stapling is available with Finisher-Cs and Finisher-Cs with Booklet Maker. 77: Staple-free stapling doe not have binding force equal to stapled stapling. Bound part may be easily separated depending on the paper, temperature, humidity, and how the page is turned over. 78: Available staple positions vary depending on the paper size. 79: Punching function cannot be added. Select a finisher with the hole punching function. *10: Available number of punch holes varies depending on the paper size. *11: The maximum number of sheets varies depending on the paper weight. Booklet may not be tightly closed depending on the size or type of the paper. *12: When using the copy function, the range of settable paper weight is limited. *13: When the Extension Tray is pulled out.

Finisher D6 / Finisher D6 with Booklet Maker+ Inserter D1(Optional)

Item		Description			
		Finisher D6	Finisher D6 with Booklet Maker		
	Output Tray	Sort / Stack			
Туре	Finishing Tray	Sort (Offset available) / Stack (Offset available)			
	Booklet Tray	_	Sort / Stack		
Paper Size	Output Tray	Max: 12 x 18" (305 x 457 mm), A3 Min: A5, Postcard (100 x 148 mm)			
.,	Finishing Tray	Max: 12 x 18" (305 x 457 mm), A3, Min: A5 SEF			
Danca Wainlet	Output Tray	52 to 250 gsm			
Paper Weight	Finishing Tray	52 to 250 gsm			
	Output Tray	500 sheets (A4)			
Paper Capacity*1	Finishing Tray	[Without Stapling] A4: 3,000 sheets JIS B4 or Iarger: 1,500 sheets Mixed Size Stacking*2: 350 sheets [With Stapling] A4: 200 sets or 3,000 sheets JIS B4 or larger: 100 sets or 1,500 sheets	[Without Stapling] A4: 2,000 sheets JIS B4 or Ingger: 1,500 sheets Mixed Size Stacking ⁻² : 350 sheets [With Stapling] A4: 200 sets or 2,000 sheets JIS B4 or larger: 100 sets or 1,500 sheets		
	Booklet Tray	-	20 sets*3		
	Capacity	100 sheets (90 gsm or less)*4			
Charle	Paper Size *5	Max: A3, 11 x 17"; Min: JIS B5			
Staple	Paper Weight	52 to 200 gsm			
	Position	Single stapling, Dual stapling, 4 stapling			
	Number of Holes	2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)			
Punch*6	Paper Size*7	Max: A3, 11 x 17"; Min: JIS B5 LEF			
	Paper Weight	52 to 200 gsm			
	Capacity*8	-	Saddle Staple: 30 sheets (90 gsm or less) Single Fold: 5 sheets (220 gsm or less)		
Booklet Finishing	Paper Size	-	Max: 12 x 18" (305 x 457 mm), A3, 11 x 17" Min: JIS B5 SEF		
	Paper Weight*9	-	60 to 200 gsm		
	Paper Size	Max: 12 x 18" (305 x 457 mm) A3, 1	1 x 17"; Min: A5 LEF*11		
Inserter D1*6*10	Paper Weight	60 to 250 gsm			
ilisertei D1	Paper Capacity*1	250 sheets			
Power Supply		AC100-127 V +/- 10 %, 3 A, AC200-240 V +/- 10 %, 1.8 A, 50/60 Hz common			
Maximum Power Consumption		360 W			
Dimensions / Weight		W 1,025 x D 725 x H 1,235 mm, 132 kg When Folder Unit CD2 is installed: W 1,262 x D 725 x H 1,235 mm, 187 kg	$\begin{array}{l} W\ 1,062\ x\ D\ 725\ x\ H\ 1,235\ mm,\\ 152\ kg\\ When Folder\ Unit\ CD2\ is\ installed:\\ W\ 1,299\ x\ D\ 725\ x\ H\ 1,235\ mm,\\ 207\ kg\\ \end{array}$		

Note: Inserter D1 and Finisher Installation Kit are required. *1: 70 gsm paper. *2: When larger size sheets are stacked on top of smaller size sheets. *3: When 16 sheets/set. *4: 65 sheets for sizes exceeding A4. *5: Available staple positions vary depending on the paper size. *6: Optional. *7: Available number of punch holes varies depending he paper size. *8: The capacity can decrease depending on type and weight of paper being used and other conditions. *9: When using the copy function, the range of settable paper weight is limited. *10: Nothing will be printed on the sheets loaded in the Inserter D1. *11: Available when custom size is entered.

Enhanced basic functions

- Paper Supply
 Reduce/Enlarge
 Slight Reduction
 Auto 2 Sided Output
 Pages per Side (2 Pages / 4 Pages / 8 Pages)
 Copy Output (uncollated/collated)
- Copy (ID Card)
 Mixed Size Originals
- Original Size
 Background Suppression

- Back Kground Suppression
 Book Copying
 Edge Erase
 Image Shift
 Mirror Image / Negative Image
 Image Rotation
 Booklet Creation
 Multiple-Up x Booklet Creation
 2 Sided Book Copying
 Covers
 Covers CoversPoster
- Repeat Image Preset Repeat Image
- Annotations Watermark(optional)
- Joint Job Sample Job
 Delete Outside / Delete Inside

- Form Overlay
 Staple / Staple From Overlay
 Staple / Staple From Staple / Punch / Folding / Saddle Staple / Covers and Separators (optional)

- PCL
 Adobe® PostScript® 3™ (optional)
 Multi-Model Print Driver 2
 Microsoft Universal Print
 Secure Print
 Sample Set

- Delayed Print
 Print from Folder
- Form Registration
 Multiple-Up
- Booklet Creation
 Multiple-Up x Booklet Creation
- Poster
- Poster
 Covers/Separators
 Envelope printing
 Private Charge Print
 Charge Print
 Print from USB (optional)
 Stanle / Stanle froe Stanle
- Staple / Staple-free Staple / Punch / Folding / Saddle Staple / Covers and Separators (optional)
 Server-less On-Demand Print (optional)
- (optional)

Fax (Optional)

- G3 × maximum 3 ports (optional) Internet Fax SIP Fax (optional)
- Send Direct Fax
- Address Book (maximum 5,000 entries)
 Broadcast Transmission / Group
- Transmission Redial / Resend Unsent Documents
- Rotate 90 Degrees
- Preview
 2 Sided Scanning
- Resolution

- Resolution
 Lighten/Darken
 Original Type
 Mixed Size Originals
 Transmission Header
 Priority Send / Delay Start
 Cover Page
 Remote Folder
 Transmission Report
 Activity Report

- Activity Report
- Re-enter Recipient
- Prevents Unsolicited Faxes
- Prohibit Direct Fax
 Receive Paperless Fax
- Simple Image Log Support
 Paperless Fax Delivery (optional)

Scan

- - Scan to Folder
 (TWAIN driver/Web browser)
 Transfer via SMB/FTP/SFTP
 Email
- Scan (LIRL)
- Scan (ORE)
 Scan to USB (optional)
 Simultaneous transmission st Email / Transfer via SMB, etc. sion such as

- ScanAutoPreview
- Color Scanning
 Color Scanning
 Mixed Size Originals
 File Format: TIFF / JPEG / PDF*1 /
- XDW(DocuWorks)*2
 Microsoft Excel / Word format

- Microsoft Excel / Word format (optional)
 Single File for Each Page
 Searchable Text (optional)
 High Compression (High Speed) (optional)
 Background Suppression
 Shadow Suppression
 Shadow Suppression
 Auto Upright Orientation
 Skew Correction
 Skip Blank Pages
 Book Scanning
 Job Flow Sheets
 Scan Delivery (optional)

- Scan Delivery (optional)
- *1: High Compression/Specific Color / Searchable Text / Security / Signature / Optimise For Quick Web View
- *2: High Compression/Specific Color / Searchable Text / Security / Signature

Others

- Local Authentication
- Remote Authentication (optional)
 Microsoft Entra ID* linked
- authentication (optional)

 IC Card Log In (optional)

 Serverless Authentication (optional)
- Secondary Ethernet (optional)
 Wi-Fi Support (optional)
- Data Encryption
 Data Overwrite (optional)
- Secure Watermark (optional)
 Image Log (optional)
 Message screen from an adm
 Job History Export een from an administrator
- * Formerly Azure Active Directory

fujifilm.com/fbca

FUJ!FILM

Branch of FUJIFILM Business Innovation Asia Pacific Pte, Ltd. (Cambodia Branch)

No. 321, City Tower 5th Floor, Room 5B, Mao Tse Toung Blvd, Phsar Depo 1, Khan Toul Kork, Phnom Penh, Cambodia

Tel. +855-0-2396-4501 Fax. +855-0-2396-4505

The available model varies depending on the country/region. Please ask the sales representatives for details. The product specifications, appearance and other details in this brochure are subject to change without notice

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law: *Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. *Unused postage stamps, post cards, etc. *Certificate stamps stipulated by law: *Peproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

family use or other similar uses within a limited circle.

Trademarks •FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation.

*Apeos, Smart WelcomEyes, DocuWorks, Working Folder, Cloud Service Hub, and Cloud On-Demand Print are registered trademarks or trademarks of FUJIFILM Business Innovation Corp.

*Microsoft, Active Directory, Azure, Microsoft Entra, Microsoft Edge, Excel, OneDrive, PowerPoint, SharePoint, Microsoft Teams, Windows, and Windows Server are registered trademarks of US Microsoft Corporation in the U.S. and other countries and regions. *Adobe, Adobe logo, PostScript, and PostScript logo are registered in the U.S. and other countries and regions. *Adobe, Adobe logo, PostScript, and PostScript logo are either registered trademarks or trademarks of Adobe in the United States and/or other countries. *Mopria, the Mopria Logo, and the Mopria Alliance word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. *QR Code is a registered trademarks of DENSO WAYE INCORPORATED. *All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.



For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground conn Otherwise, electronic shock may result in the case of a failure or short circuit.