

ApeosPort Print 3410SD

A4 Monochrome Printer

Features



B/W



A4



34 ppm



High Performance & Productivity

- Compact design fits comfortably on your desktop or small work space
- Fast monochrome printing of 34 ppm, with FPOT as fast as 8 seconds
- Standard 250-sheet tray allows printing without interruptions
- Easy to connect with built-in Wi-Fi, Ethernet or USB

Security



- Prevents information leakage with Confidential Print function
- Controls access to the Printer functions.
- Supports settings to delete temporary data files in memory

Easy Operation

- Two-line LCD lets you configure and monitor vital system information
- Compatible with Mopria® and AirPrint, you can easily print from mobile devices

Ecology

- Standard two-sided printing saves paper
- Supports ECO mode for easy presetting of features that save paper and toner

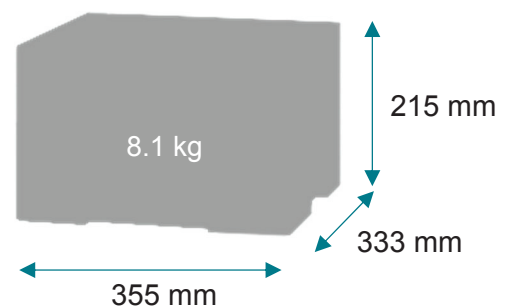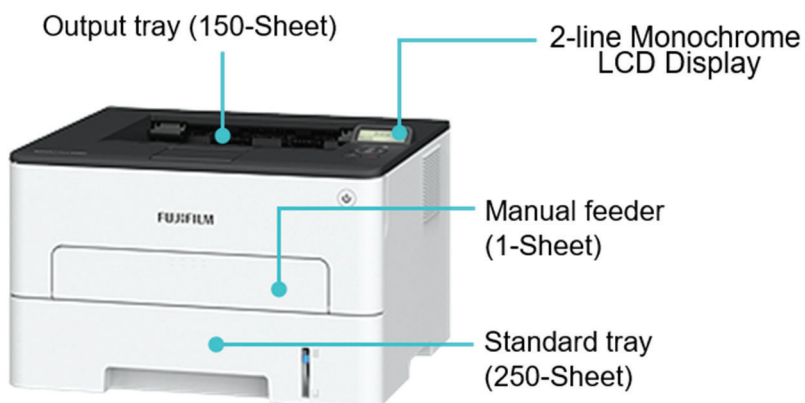

Specifications

Printing	
Display	2-line All Points Addressable (APA) monochrome LCD display
Print Speed: Up to	Black: 34 ppm (A4)
Time to First Page: As fast as	Black: 8 seconds
Print Resolution	Black: 1200 Image Quality, 2400 Image Quality, 300 x 300 dpi, 600 x 600 dpi
Memory	256 MB
Hard Disk	Not Available
Supplies	
Toner Cartridge Yields (up to)	3,000-page High Yield Cartridge, 6,000-page Extra High Yield Cartridge,
Imaging unit Estimated Yield: Up to	12000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage
Cartridge(s) Shipping with Product	700-page Toner Cartridges
Paper Handling	
Included Paper Handling	250-Sheet Input, 150-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed
Paper Input Capacity: Up to	251 pages 75 gsm
Paper Output Capacity: Up to	150 pages 75 gsm
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper
Paper Input Capacity: Up to	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope, Hagaki
General Information	
Standard Ports	Ethernet 10/100BaseTX (RJ-45), USB 2.0 Specification Hi-Speed Certified (Type B), 802.11b/g/n Wireless
Noise Level: Operating	Print: 53 dBA
Specified Operating Environment ^{*1}	Humidity: 15 to 80% ^{*2} Relative Humidity, Temperature: 10 to 32°C ^{*3} (excluding faults caused by condensation)
Size (mm - H x W x D) / Weight (kg)	215 x 355 x 333 mm / 8.1 kg

*1 : Depending on the paper used, the print quality may be degraded until the temperature and humidity environment just before use and the inside of the printer fit into the installation environment. *2 : When the humidity is 80%, the temperature is 25.5°C or less. *3 : Humidity 45% or less when the temperature is 32°C

Consumables^{*1}

Product Name	Product Code	Product Life
Black High Yield Use and Return Toner Cartridge ^{*2}	CT203483	Up to 3,000 pages
Black Extra High Yield Use and Return Toner Cartridge ^{*2}	CT203482	Up to 6,000 pages
Black Extra High Yield Regular Toner Cartridge	CT203528	Up to 6,000 pages
Black Imaging Unit	CT351281	Up to 12,000 pages

*1 : Average standard page yield value declared in accordance with ISO/IEC 19752.

*2 : The Use and Return consumables are sold with at a special price contingent upon customer's agreement to use them only once and return them to us for remanufacturing or recycling. For details, please refer to our website.

Notes

Although Use and Return consumables are initially installed, consumables without the single-use term, which may be refilled or remanufactured by you or a third party, are available. For details, please refer to our website.

fujifilm.com/fbhk

FUJIFILM

FUJIFILM Business Innovation Hong Kong Limited

11/F, 12 Taikoo Wan Road, Taikoo Shing, Hong Kong
Tel. +852 2513 2888 Fax. +852 2560 6433

Customer Support Center

Hong Kong Tel. +852 2513 2513 Fax. +852 2513 2518
Macau Tel. +853 2855 8008 Fax. +853 2857 4996
Email: shm-fbhc-csc@fujifilm.com

FUJIFILM BI Hong Kong 