




# ApeosPort® 4020SD

A4 Monochrome Multifunction Printer

#### **Features**





## **High Performance & Productivity**

- High-speed printing of 40 ppm with a small footprint
- 1-pass Duplex automatic document feeder supports high-speed scanning of 92 ppm for Monochrome and 40 ppm for Colour
- Supports 350 sheets media input capacity as standard and up to a maximum of 900 sheets including optional 100-sheet Multipurpose Feeder and 550-Sheet Tray
- Easy to connect with built-in Wi-Fi, Ethernet or USB.

## Security


- Prevents information leakage with Confidential Print function
- Controls access to the MFPs functions
- Supports settings to delete temporary data files in memory

## **Easy Operation**

- Intuitive 2.8-inch colour touch panel
- Equipped with Copy, Print, Fax, and Scan functions as Standard. It also supports ID Copy function, which allows you to Copy the front and back of an ID card onto one side of a single sheet
- Compatible with Mopria® and AirPrint, you can easily print from mobile devices.
- Direct print\* from/ scan to a USB flash drive without using a computer
   \*PDF/TIFF/JPEG

#### **Ecology**

- Standard two-sided printing saves paper
- Supports ECO mode for easy presetting of features that save paper and toner

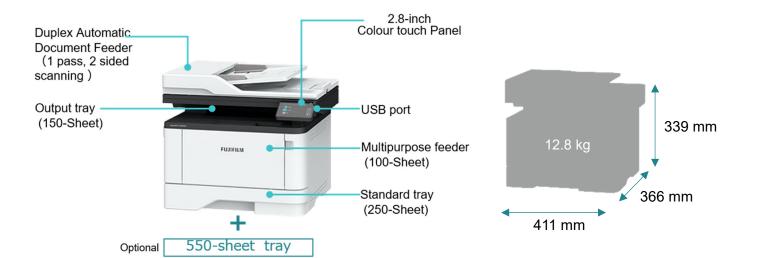

### **Specifications**

| Printing                            |   |  |  |
|-------------------------------------|---|--|--|
| Display                             | 2.8-inch (7.2 cm) LCD touch panel   |  |  |
| Print Speed: Up to                  | Black: 40 ppm (A4)  |  |  |
| Time to First Page: As fast as*1    | Black: 5.9 seconds  |  |  |
| Print Resolution                    | Black: 2400 IQ (2400 x 600 dpi), 600 x 600 dpi  |  |  |
| Memory                              | 512 MB  |  |  |
| Hard Disk                           | Not Available   |  |  |
| Copying                             |   |  |  |
| Copy Speed: Up to                   | Black: 39 ppm (A4)  |  |  |
| Time to First Copy: As fast as*2    | Black: 6.1 seconds  |  |  |
| Scanning                            |   |  |  |
| Scanner Type / ADF Scan             | Flatbed scanner with ADF / DADF (single pass Duplex)  |  |  |
| A4/Ltr Duplex Scan Speed: Up to     | Mono: 92 / 96 ppm / Colour: 40 / 42 ppm   |  |  |
| A4/Ltr Simplex Scan Speed: Up to    | Mono: 46 / 48 ppm / Colour: 20 / 21 ppm   |  |  |
| ADF Paper Input Capacity: Up to     | 50 pages 75 gsm   |  |  |
| Faxing                              |   |  |  |
| Modem Speed                         | I ITU T.30, V.34 Half-Duplex, 33.6 Kbps   |  |  |
| Supplies                            |   |  |  |
| Toner Cartridge Yields (up to)      | 6,000 -page Black High Yield Cartridge / 20,000 -page Black Extra High Yield Cartridge  |  |  |
| maging Unit Estimated Yield: Up to  | 40,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage   |  |  |
| Cartridge(s) Shipping with Product  | 3,000 -page Toner Cartridge   |  |  |
| Paper Handling                      |   |  |  |
| ncluded Paper Handling              | 100-Sheet Multipurpose Feeder, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input   |  |  |
| Optional Paper Handling             | 550-Sheet Tray  |  |  |
| Paper Input Capacity: Up to         | Standard: 350 pages 75 gsm / Maximum: 900 pages 75 gsm  |  |  |
| Paper Output Capacity: Up to        | 150 pages 75 gsm  |  |  |
| Media Types Supported               | Paper Labels, Card Stock, Plain Paper, Envelopes  |  |  |
| Media Sizes Supported               | A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Letter, Statement, Executive, Universal, DL Envelope, Folio, 10 Envelope |  |  |
| General Information                 |   |  |  |
| Standard Ports                      | Ethernet 10/100 Base TX (RJ-45), USB Compatible with USB 2.0 Specification (Type B), 802.11 b/g/n Wireless                              |  |  |
| Noise Level: Operating              | 53 dBA (Print) / 59 dBA (Copy) / 58 dBA (Scan)  |  |  |
| Specified Operating Environment*3   | Humidity: 8 to 80% 4 Relative Humidity, Temperature: 10 to 32°C 5 (excluding faults caused by condensation)                             |  |  |
| Size (mm - H x W x D) / Weight (kg) | 339 x 411 x 366 mm / 12.8 kg  |  |  |

<sup>\*1:</sup> The time from when the device starts the print job from standard sheet tray until the trailing edge of the first page exits into output tray. Numeric value may vary based on the output environment. \*2: Numeric value varies depending on the output environment. \*3: Depending on the paper used, the print quality may be degraded until the temperature and humidity environment just before use and the inside of the printer fit into the installation environment. \*4: When the humidity is 80%, the temperature is 25.5°C or less. \*5: Humidity 45% or less when the temperature is 32°C.

# **Options**

| Product Name   | <b>Product Code</b> |
|----------------|---------------------|
| 550-Sheet Tray | EL300955            |

#### Consumables\*1

| Product Name  | Product Code | Product Life       |
|---|--------------|--------------------|
| Black High Yield Use and Return Toner Cartridge*2       | CT203550     | Up to 6,000 pages  |
| Black Extra High Yield Use and Return Toner Cartridge*2 | CT203478     | Up to 20,000 pages |
| Black Extra High Yield Regular Toner Cartridge          | CT203524     | Up to 20,000 pages |
| Imaging Unit  | CT351280     | Up to 40,000 pages |

<sup>\*1:</sup> Average standard page yield value declared in accordance with ISO/IEC 19752.

#### Notes

Although Use and Return consumables are initially installed, consumables without the single-use term, which may be refilled or remanufactured by you or a third party, are available. For details, please refer to our website.

For more information or detailed product specification, please call or visit us at

#### FUJIFILM Business Innovation Asia Pacific Pte. Ltd. (Myanmar Branch)

#1201 -1205, 12th Floor of Sakura Tower, 339 Bogyoke Aung San Road, Kyauktada Township, Yangon, Myanmar Tel: (+95) 1 825-5374 Fax: (+95) 1 825-5396

fujifilm.com/fbmm

<sup>\*2:</sup> The Use and Return consumables are sold with at a special price contingent upon customer's agreement to use them only once and return them to us for remanufacturing or recycling. For details, please refer to our website.

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

•FUJIFILM and FUJIFILM logo are registered trademarks or trademarks •Apple, AirPrint and Mac are trademarks of Apple Inc. registered in the U.S. and other countries. •Mopria® Logo, and the Mopria Alliance M word mark and logo are registered and/or unregistered trademarks of Apple Inc. in the United States and other countries. Unauthorized use is strictly prohibited. •All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.