


ApeosPort[®] 3410SD

A4 Monochrome Multifunction Printer

Features



High Performance & Productivity

- Compact design sits comfortably onto your desktop or small work space
- Fast monochrome printing of up to 34 ppm
- Equipped with an Automatic Document Feeder that supports scanning up to 23 ppm for Monochrome, 7 ppm for Colour, and a 250-sheet tray as standard equipment
- Easy to connect with built-in Wi-Fi, Ethernet or USB

FUJ:FILM

Easy Operation


- Two-line LCD lets you configure and monitor vital system information
- Supports ID Copy function, which allows you to Copy the front and back of an ID card onto one side of a single sheet
- Compatible with Mopria[®] and AirPrint, you can easily print from mobile devices

Ecology

- Standard two-sided printing saves paper
- Supports ECO mode for easy presetting of features that save paper and toner

Security

- Prevents information leakage with Confidential Print function
- Controls access to the MFPs functions
- Supports settings to delete temporary data files in memory

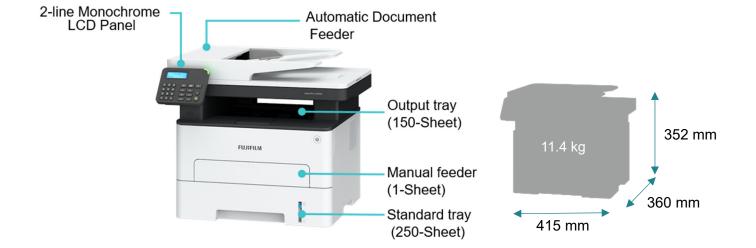

Specifications

| Printing | |
|--|--|
| Display | 2-line All Points Addressable (APA) monochrome LCD display |
| Print Speed: Up to | Black: 34 ppm (A4) |
| Time to First Page: As fast as ^{*1} | Black: 8 seconds |
| Print Resolution | Black: 1200 Image Quality, 2400 Image Quality, 300 x 300 dpi, 600 x 600 dpi |
| Memory | 512 MB |
| Hard Disk | Not Available |
| Copying | |
| Copy Speed: Up to | Black: 34 ppm (A4) |
| Time to First Copy: As fast as ^{*2} | Black: 8.0 seconds |
| Scanning | |
| Scanner Type / ADF Scan | Flatbed scanner with ADF / Simplex |
| A4/Ltr Simplex Scan Speed: Up to | Black: 23 / 25 ppm / Colour: 7 / 8 ppm |
| ADF Paper Input Capacity: Up to | 50 pages 75 gsm |
| Faxing | |
| Modem Speed | Max is 33,600 bps, V.34 Half-Duplex Kbps |
| Supplies | |
| Toner Cartridge Yields (up to) | 3,000-page High Yield Cartridge, 6,000-page Extra High Yield Cartridge |
| Imaging Unit Estimated Yield: Up to | 12000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage |
| Cartridge(s) Shipping with Product | 700-page Toner Cartridges |
| Paper Handling | |
| Included Paper Handling | 250-Sheet Input, 150-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed |
| Paper Input Capacity: Up to | 251 pages 75 gsm |
| Paper Output Capacity: Up to | 150 pages 75 gsm |
| Media Types Supported | Card Stock, Envelopes, Paper Labels, Plain Paper |
| Media Sizes Supported | A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Letter, B5 Envelope, Statement, C5 |
| | Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope, Hagaki |
| General Information | |
| Standard Ports | Ethernet 10/100BaseTX (RJ-45), USB 2.0 Specification Hi-Speed Certified (Type B), 802.11b/g/n |
| | Wireless |
| Noise Level: Operating | Print: 52 dBA / Copy: 55 dBA / Scan: 52 dBA |
| Specified Operating Environment*3 | Humidity: 15 to 80% ^{*4} Relative Humidity, Temperature: 10 to 32°C ^{*5} (excluding faults caused by |
| 1 1 5 | condensation) |
| Size (mm - H x W x D) / Weight (kg) | 352 x 415 x 360 mm / 11.4 kg |

*1: The time from when the device starts the print job from standard sheet tray until the trailing edge of the first page exits into output tray. Numeric value may vary based on the output environment. *2: Numeric value varies depending on the output environment. *3: Depending on the paper used, the print quality may be degraded until the temperature and humidity environment just before use and the inside of the printer fit into the installation environment. *4: When the humidity is 80%, the temperature is 25.5°C or less. *5: Humidity 45% or less when the temperature is 32°C.

Consumables^{*1}

| Product Name | Product Code | Product Life |
|---|--------------|--------------------|
| Black High Yield Use and Return Toner Cartridge ^{*2} | CT203483 | Up to 3,000 pages |
| Black Extra High Yield Use and Return Toner Cartridge*2 | CT203482 | Up to 6,000 pages |
| Black Extra High Yield Regular Toner Cartridge | CT203528 | Up to 6,000 pages |
| Black Imaging Unit | CT351281 | Up to 12,000 pages |

*1: Average standard page yield value declared in accordance with ISO/IEC 19752.

*2: The Use and Return consumables are sold with at a special price contingent upon customer's agreement to use them only once and return them to us for remanufacturing or recycling. For details, please refer to our website.

| Notes |
|--|
| Although Use and Return consumables are initially installed, consumables |
| without the single-use term, which may be refilled or remanufactured by |
| you or a third party, are available. For details, please refer to our website. |

For more information or detailed product specification, please call or visit us at FUJIFILM Business Innovation Asia Pacific Pte. Ltd. Reg. No. 199202000004 (993478-A) ST No. W10-1808-32000018

fujifilm.com/fbmy

Ground Floor, Axis Business Park, Block C, No. 10 Jalan Bersatu 13/4, 46200 Petaling Jaya, Selangor, Malaysia. Tel: 03-7882 2888 Fax: 03-7882 2828 Customer Service Hotline: 1300-88-1163

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements. •FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. •ApeosPort is registered trademarks or trademarks of FUJIFILM Business Innovation Corp. •Apple, AirPrint and Mac are trademarks of Apple Inc. registered in the U.S. and other countries. • Mopria[®], the Mopria[®] Logo, and the Mopria Alliance[™] word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.