



ApeosPort® Print 3410SD

A4 Monochrome Printer

Features













High Performance & Productivity

- Compact design fits comfortably on your desktop or small work space
- Fast monochrome printing of 34 ppm, with FPOT as fast as 8 seconds
- Standard 250-sheet tray allows printing without interruptions
- Easy to connect with built-in Wi-Fi, Ethernet or USB

Security


- Prevents information leakage with Confidential Print function
- Controls access to the Printer functions.
- Supports settings to delete temporary data files in memory


Easy Operation

- Two-line LCD lets you configure and monitor vital system information
- Compatible with Mopria® and AirPrint, you can easily print from mobile devices

Ecology

- Standard two-sided printing saves paper
- Supports ECO mode for easy presetting of features that save paper and toner

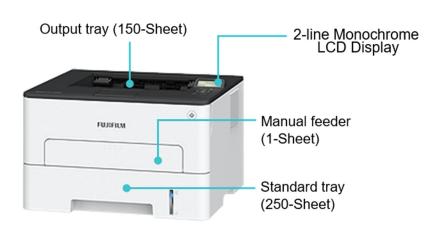

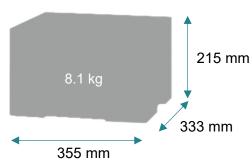

Specifications

•		
Printing		
Display	2-line All Points Addressable (APA) monochrome LCD display	
Print Speed: Up to	Black: 34 ppm (A4)	
Time to First Page: As fast as*1	Black: 8 seconds	
Print Resolution	Black: 1200 Image Quality, 2400 Image Quality, 300 x 300 dpi, 600 x 600 dpi	
Memory	256 MB	
Hard Disk	Not Available	
Supplies		
Toner Cartridge Yields (up to)	3,000-page High Yield Cartridge, 6,000-page Extra High Yield Cartridge,	
Imaging unit Estimated Yield: Up to	12000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product	700-page Toner Cartridges	
Paper Handling		
Included Paper Handling	250-Sheet Input, 150-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed	
Paper Input Capacity: Up to	251 pages 75 gsm	
Paper Output Capacity: Up to	150 pages 75 gsm	
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper	
Paper Input Capacity: Up to	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Letter, B5 Envelope, Statement, C Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope, Hagaki	
General Information		
Standard Ports	Ethernet 10/100BaseTX (RJ-45), USB 2.0 Specification Hi-Speed Certified (Type B), 802.11b/g/n Wireless*2	
Noise Level: Operating	Print: 53 dBA	
Specified Operating Environment*3	Humidity: 15 to 80% ^{*4} Relative Humidity, Temperature: 10 to 32°C ^{*5} (excluding faults caused by condensation)	
Size (mm - H x W x D) / Weight (kg)	215 x 355 x 333 mm / 8.1 kg	

^{*1:} The time from when the device starts the print job from standard sheet tray until the trailing edge of the first page exits into output tray. Numeric value may vary based on the output environment. *2: This description is for SGP IMDA: Rated RF output power <20 dBm EIRP, Frequency range 2412 – 2472 MHz. *3: Depending on the paper used, the print quality may be degraded until the temperature and humidity environment just before use and the inside of the printer fit into the installation environment. *4: When the humidity is 80%, the temperature is 25.5°C or less. *5: Humidity 45% or less when the temperature is 32°C.

Consumables*1

Product Name	Product Code	Product Life
Black High Yield Use and Return Toner Cartridge*2	CT203483	Up to 3,000 pages
Black Extra High Yield Use and Return Toner Cartridge*2	CT203482	Up to 6,000 pages
Black Extra High Yield Regular Toner Cartridge	CT203528	Up to 6,000 pages
Black Imaging Unit	CT351281	Up to 12,000 pages

^{*1:} Average standard page yield value declared in accordance with ISO/IEC 19752.

Notes

Although Use and Return consumables are initially installed, consumables without the single-use term, which may be refilled or remanufactured by you or a third party, are available. For details, please refer to our website.

For more information or detailed product specification, please call or visit us at

FUJIFILM Business Innovation Singapore Pte. Ltd.

fujifilm.com/fbsg

20E Pasir Panjang Road #02-21A Mapletree Business City Singapore 117439 Tel.+65-6766-8888

^{*2:} The Use and Return consumables are sold with at a special price contingent upon customer's agreement to use them only once and return them to us for remanufacturing or recycling. For details, please refer to our website.