



ApeosPort® Print C2410SD

A4 Colour Printer

Features













High Performance & Productivity

- Compact design fits anywhere on your work space
- Fast colour printing of up to 24 ppm, with FPOT as fast as 10.9 seconds
- Flexible media processing supports cardstock, small media, and envelopes
- Easy to connect with built-in Wi-Fi, gigabit Ethernet or USB

Security


- Prevents information leakage with Confidential Print function
- Controls access to the Printer functions
- Supports settings to delete temporary data files in memory

Easy Operation

- Two-line display lets you configure and monitor vital system information
- Compatible with Mopria® and AirPrint, you can easily print from mobile devices

Ecology

- Standard two-sided printing saves paper
- Supports ECO mode for easy presetting of features that save paper and toner

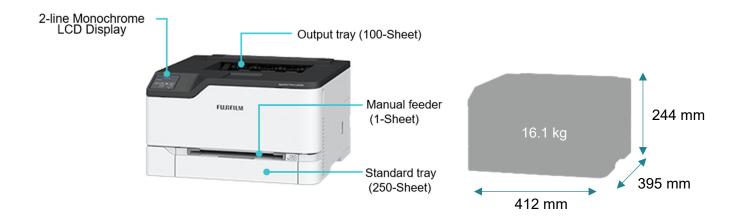

Specifications

Printing		
Display	2-line All Points Addressable (APA) monochrome LCD display	
Print Speed: Up to	Black: 24 ppm (A4) / Colour: 24 ppm (A4)	
Time to First Page: As fast as*1	Black: 10.9 seconds / Colour: 10.9 seconds	
Print Resolution	Black: 4800 Colour Quality, 600 x 600 dpi / Colour: 600 x 600 dpi, 4800 Colour Quality	
Memory	512 MB	
Hard Disk	Not Available	
Supplies		
Print Cartridge Yields (up to)	4,500 -page Black High Yield Cartridge / 4,500 -page Colour (CMY) High Yield Cartridges / 1,500 -page Black Cartridge / 1,500 -page Colour (CMY) Cartridges	
Cartridge(s) Shipping with Product	750 -page Black Toner Cartridge, 500 -page Colour (CMY) Toner Cartridge	
Paper Handling		
Included Paper Handling	100-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed, 250-Sheet Input	
Paper Input Capacity: Up to	250+1 pages 75 gsm	
Paper Output Capacity: Up to	100 pages 75 gsm	
Media Types Supported	Paper Labels, Card Stock, Plain Paper, Envelopes, Glossy Paper	
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope	
General Information		
Standard Ports	802.11b/g/n Wireless ² , USB 2.0 Specification Hi-Speed Certified (Type B), Ethernet 10/100/1000 BaseTX (RJ-45)	
Noise Level: Operating	Operating: 52 dBA (Print)	
Specified Operating Environment*3	Humidity: 8 to 80% ^{*4} Relative Humidity, Temperature: 10 to 32°C ^{*5} (excluding faults caused by condensation)	
Size (mm - H x W x D) / Weight (kg)	244 x 412 x 395 mm / 16.1 kg	

^{*1:} The time from when the device starts the print job from standard sheet tray until the trailing edge of the first page exits into output tray. Numeric value may vary based on the output environment. *2: This description is for SGP IMDA: Rated RF output power <20 dBm EIRP, Frequency range 2412 – 2472 MHz. *3: Depending on the paper used, the print quality may be degraded until the temperature and humidity environment just before use and the inside of the printer fit into the installation environment. *4: When the humidity is 80%, the temperature is 25.5°C or less. *5: Humidity 45% or less when the temperature is 32°C.

Consumables*1

Product Name	Product Code	Product Life
Black Use & Return Print Cartridge*2	CT351267	Up to 1,500 pages
Cyan Use & Return Print Cartridge*2	CT351268	Up to 1,500 pages
Magenta Use & Return Print Cartridge*2	CT351269	Up to 1,500 pages
Yellow Use & Return Print Cartridge*2	CT351270	Up to 1,500 pages
Black High Yield Use & Return Print Cartridge*2	CT351263	Up to 4,500 pages
Cyan High Yield Use & Return Print Cartridge*2	CT351264	Up to 4,500 pages
Magenta High Yield Use & Return Print Cartridge*2	CT351265	Up to 4,500 pages
Yellow High Yield Use & Return Print Cartridge*2	CT351266	Up to 4,500 pages
Black High Yield Regular Print Cartridge	CT351291	Up to 4,500 pages
Cyan High Yield Regular Print Cartridge	CT351292	Up to 4,500 pages
Magenta High Yield Regular Print Cartridge	CT351293	Up to 4,500 pages
Yellow High Yield Regular Print Cartridge	CT351294	Up to 4,500 pages
Waste Print Bottle	CWAA0973	Up to 15 000 pages

^{*1:} Average continuous black or continuous composite Colour (CMY) declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19798

Notes

Although Use and Return consumables are initially installed, consumables without the single-use term, which may be refilled or remanufactured by you or a third party, are available. For details, please refer to our website

For more information or detailed product specification, please call or visit us at

FUJIFILM Business Innovation Singapore Pte. Ltd.

fujifilm.com/fbsg

20E Pasir Panjang Road #02-21A Mapletree Business City Singapore 117439 Tel.+65-6766-8888

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements

•FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. •ApeosPort is registered trademarks or trademarks of FUJIFILM Business Innovation Corp.

•Apple, AirPrint and Mac are trademarks of Apple Inc. registered in the U.S. and other countries. •Mopria®, the Mopria® Logo, and the Mopria Alliance™ word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. •All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies

^{*2:} The Use and Return consumables are sold with at a special price contingent upon customer's agreement to use them only once and return them to us for remanufacturing or recycling. For details, please refer to our website.